

# Sound Retardant Doors


**NON-RATED** (DSR45, DSR46, DSR47) (12)

**Product Features and Specifications**

**Interior Only (1)**

<b>Thickness</b>	1-3/4"
<b>Acoustic Rating</b>	<b>STC-45, STC-46, STC-47:</b> per ASTM E90-90 and E413 <b>(11)</b>
<b>Maximum Size</b>	4/0 x 8/0 <b>(45)</b>
<b>Minimum Size</b>	1/5-3/4 x 5/11-1/4
<b>Faces</b>	• Wood Veneer • Primed MDO
<b>Crossbands</b>	Not applicable
<b>Stiles</b>	LSL on hinge and lock edge with veneer bands to match the face.
<b>Top Rails</b>	LSL <b>(49)</b>
<b>Bottom Rails</b>	Bottom rails same as top rails <b>(49)</b>
<b>Face Assembly Adhesive</b>	Type II (water resistant)
<b>Core Assembly Adhesive</b>	Not applicable
<b>Core</b>	Acoustic Pan
<b>Maximum Size of Lite Openings</b>	Not available
<b>Other Detail Work(21)</b>	• Fitting • Machining
<b>Factory Finish (8)</b>	• Clear or Stain w/ Enviroclad UV® finish • Prime • Opaque with flat gloss topcoat
<b>Warranty</b>	Full; 1 year warranty <b>(1)</b>
<b>Door Weight</b>	9.3 lbs. per sq. ft.
<b>Required Hinges</b>	Doors up to and including 90" require 3 hinges; doors over 90" require 4 hinges (per NFPA 80). 0.190" x 5" x 4-1/2" hinges are recommended, however, 0.180" x 4-1/2" x 4-1/2" may be used.

\*Refer to separate page for explanation of footnotes.

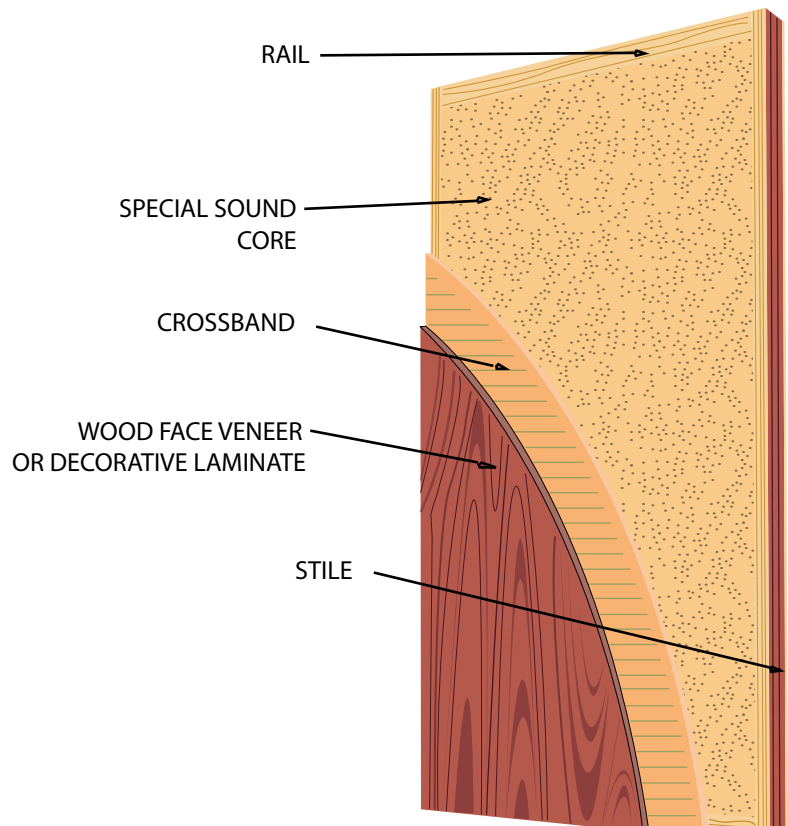

The mark of excellence™ 

Note: Marshfield DoorSystems, Inc. doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.

For more information call: 800-869-3667

©2005 Marshfield DoorSystems, Inc. Marshfield Signature Series doors meet WDMA premium grade and AWI custom grade standards.