

Sound Retardant Doors


Positive Pressure with Concealed Intumescents (13) (14) - 20-MINUTE STC 41 (DSR-41PP)

Product Features and Specifications

Interior Only (1)

Thickness	1-3/4"
Acoustic Rating	STC-41: per ASTM E90-90 (11)
Maximum Size	ITS-WH & UL: Single: 4/0 x 8/0 Pair: 8/0 x 8/0 (45,59)
Minimum Size	0/8 x 1/10 (32)
Faces(38)	• Wood Veneer • Decorative Laminate • Primed MDO
Crossbands	Engineered fiber
Stiles	Singles & Pairs: 1-3/8" Concealed Intumescent Positive Pressure Stiles with veneer bands to match face
Top Rails (4)	Single: 7/8" (after trim) Mill Option
Bottom Rails (4)	Pair: 3-1/8" (after trim) Mill Option
Face Assembly Adhesive	Type I (waterproof)
Core Assembly Adhesive	Type II (water-resistant)
Core	High-density particleboard, hardboard and insulation
Maximum Size of Lite Openings (6,39)	METAL VISION FRAMES or WOOD MOULDING: DSR-41PP: Total area of openings not to exceed 300 sq. in. of visible glass or one continuous dimension of 12" W or 36" H
Other Detail Work (7,19,20,21,40,41,42)	• Fitting • Machining • Glazing • Applied Moulding
Factory Finish (8)	• Clear or Stain w/ Enviroclad UV® finish • Prime • Opaque with flat gloss topcoat
Warranty	Full; life of original installation (1)
Door Weight	7.1 lbs. per sq. ft.
Recommended Hinges	Doors up to 60" in length require two hinges; doors > 60" and less than or equal to 90" require 3 hinges; doors over 90" require 4 hinges (per NFPA 80). 0.180" x 4-1/2" x 4-1/2" hinges are recommended, however, 0.134" x 4-1/2" x 4-1/2" may be used.

*Refer to separate page for explanation of footnotes.

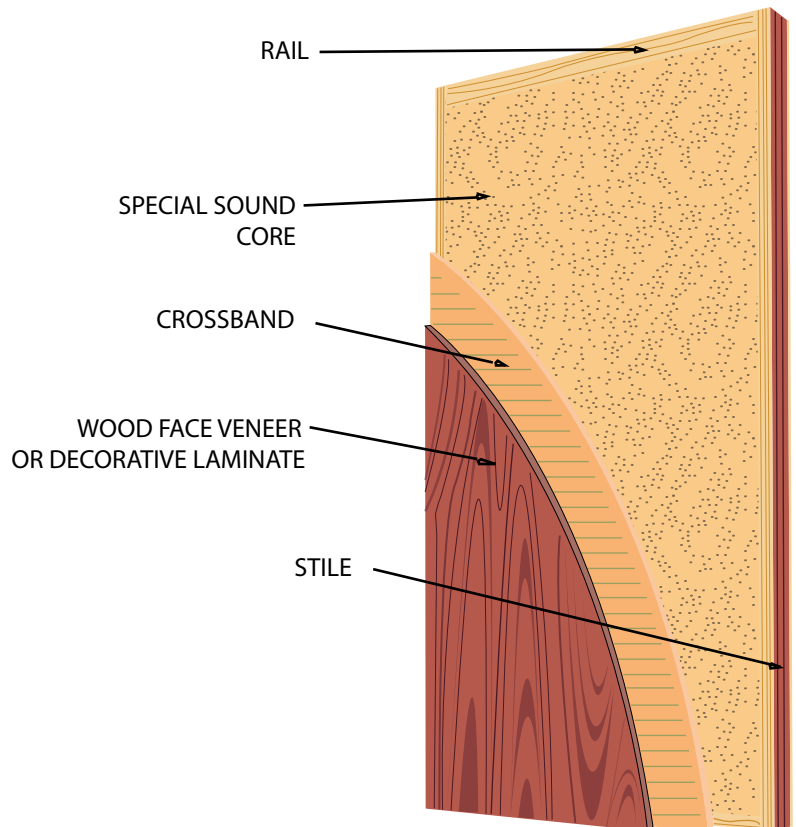

The mark of excellence™



Note: Marshfield DoorSystems, Inc. doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.