


Staved Lumber Core Doors

Neutral Pressure (12) - NON-RATED (DSC-1) and 20-MINUTE (DFS-20)

Product Features and Specifications	Interior Only (1)
Thickness	1-3/4", 2", 2-1/4"
Maximum Size	DSC-1: Single: 4/0 x 10/0 Pair: 8/0 x 10/0 DFS-20: ITS-WH & UL: Single: 4/0 x 10/0 Pair: 8/0 x 10/0 Double Egress Pair: 8/0 x 8/0
Minimum Size	0/8 x 1/10 (32)
Faces	• Wood Veneer • Decorative Laminate • Primed MDO • Styled® Door Face
Crossbands	Engineered fiber
Stiles	1" LSL with veneer band or decorative laminate to match face (2,3)
Top and Bottom Rails	7/8" (after trim) Mill Option (4,5,24,25)
Face Assembly Adhesive	Type I (waterproof)
Core Assembly Adhesive	Type II (water-resistant)
Core	Butt-jointed staved lumber core
Maximum Size of Lite Openings (6,33)	METAL VISION FRAMES or WOOD MOULDING: DSC-1: (9) (10) Total area of openings not to exceed 1,296 sq. in. of visible glass or one continuous dimension of 38" W or 54" H •See Glazing Table
Other Detail Work (7, 21)	• Fitting • Machining • Applied Mouldings • Dutch • Transom • Reveals • Radius Lites Only available in DSC-1: •Wicket •Divided Lite •Stain Glass •Embossed Glass •Custom Lite •Grilles
Factory Finish (8)	• Clear or Stain w/ Enviroclad UV® finish • Prime • Opaque with flat gloss topcoat
Warranty	Full; life of original installation (1)
Security Rating	Class 40 (9), highest Security Rating possible
Acoustic Rating (11)	STC 31 (Inoperable)

*Refer to separate page for explanation of footnotes.

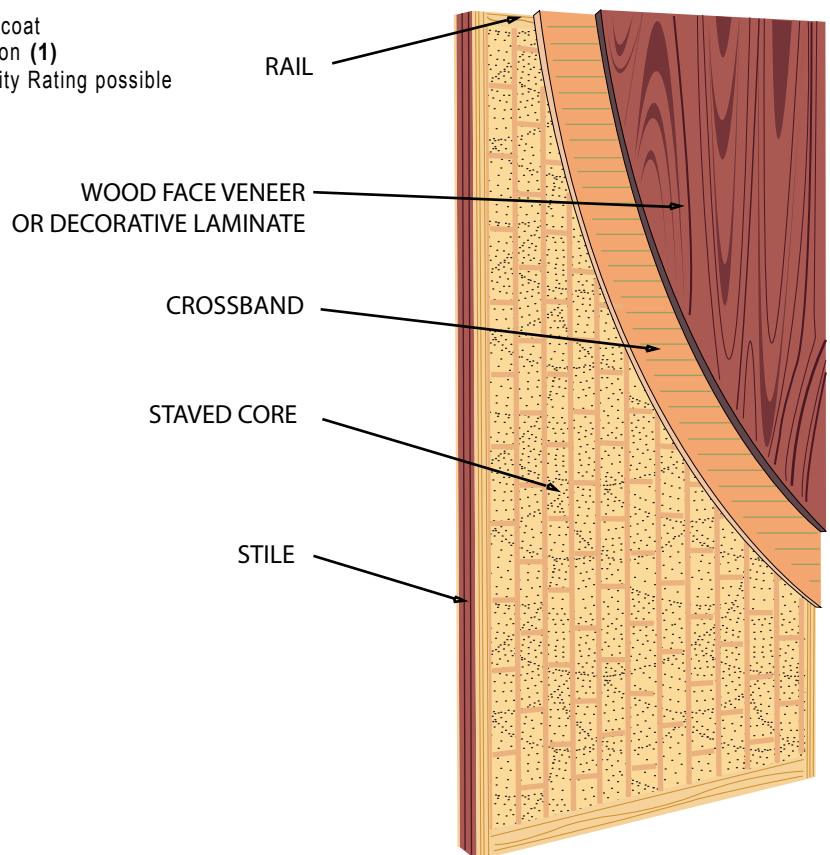

The mark of excellence™ 

Note: Marshfield DoorSystems, Inc. doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.