


# Staved Lumber Core Doors

Positive Pressure with Frame Mounted Intumescents (13) (14) - 20-MINUTE (DFS-20PPFM)

Product Features and Specifications	Interior Only (1)
<b>Thickness</b>	1-3/4", 2", 2-1/4"
<b>Maximum Size</b>	<b>ITS-WH &amp; UL:</b> Single: 4/0 x 10/0 <b>Pair:</b> 8/0 x 9/0 (65) DFS-20PPFM: Double Egress <b>Pair:</b> 8/0 x 9/0 (65)
<b>Minimum Size</b>	0/8 x 1/10 (32)
<b>Faces</b>	<ul style="list-style-type: none"> <li>• Wood Veneer</li> <li>• Primed MDO</li> <li>• Decorative Laminate</li> <li>• Styled® Door Face</li> </ul>
<b>Crossbands</b>	Engineered fiber
<b>Stiles</b>	1" LSL with veneer band or decorative laminate to match face (2,3)
<b>Top and Bottom Rails</b>	7/8" (after trim) Mill Option (4,5,24,25)
<b>Face Assembly Adhesive</b>	Type I (waterproof)
<b>Core Assembly Adhesive</b>	Type II (water-resistant)
<b>Core</b>	Butt-jointed staved lumber core
<b>Lite Openings (6)</b>	See Glazing Table
<b>Other Detail Work (7,10,21,35)</b>	<ul style="list-style-type: none"> <li>• Fitting    • Machining    • Applied Mouldings    • Dutch Doors    • Transoms    • Reveals</li> <li>• Radius Lites</li> </ul>
<b>Factory Finish (8)</b>	<ul style="list-style-type: none"> <li>• Clear or Stain w/ Enviroclad UV® finish</li> <li>• Prime</li> <li>• Opaque with flat gloss topcoat</li> </ul>
<b>Warranty</b>	Full; life of original installation (1)
<b>Security Rating</b>	Class 40 (9), highest Security Rating possible
<b>Acoustic Rating (11)</b>	STC 31 (Inoperable)

\*Refer to separate page for explanation of footnotes.

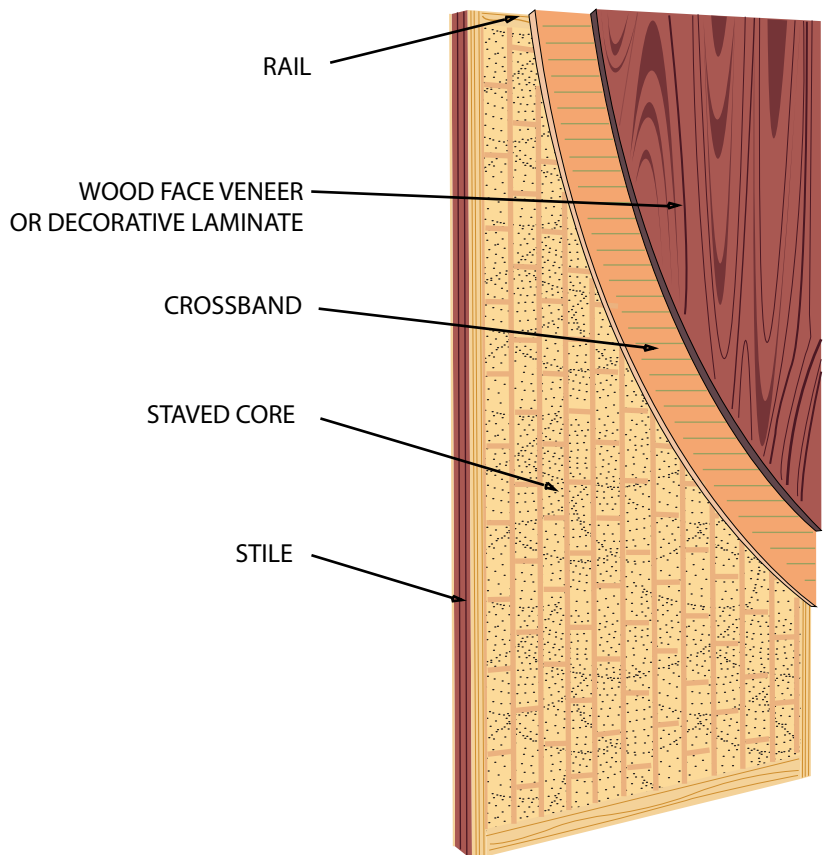

The mark of excellence™



Note: Marshfield DoorSystems, Inc. doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.