

# Extra Heavy Duty Particleboard Core Doors

Marshfield Signature Series®

Neutral Pressure, Positive Pressure, Environmental

Standard Models: EHDPC, EHDFP

Environmental Models: EEHDPC, EEHDPCUF

Product Features  
and Specifications

Interior Use Only

## Thickness

1-3/4", 2", 2-1/4"

## Maximum Size

	ITS-WH and UL- Max 20 minute				
	Non Rated	NP	Cat. A (PP)	Cat. A (PPAF)	Cat B (PPFM)
Single	4/0 x 10/0	4/0 x 10/0	4/0 x 10/0	4/0 x 9/0	4/0 x 10/0
Pair	8/0 x 10/0	8/0 x 10/0	8/0 x 9/0	8/0 x 9/0	8/0 x 9/0
DE Pair	8/0 x 10/0	8/0 x 8/0	8/0 x 9/0	N/A	8/0 x 9/0

## Minimum Size

0/8 x 1/10 or 1/10 x 8/0

## Faces

- Wood Veneer
- Decorative Laminate
- Styled® Door Face
- MDO

## Crossbands

Engineered Composite

## Stiles

Manufacturer's standard construction per label service listing with edge band to match face

## Top & Bottom Rails

Manufacturer's standard construction per label service listing

## Face & Core Assembly Adhesive

Per requirements of WDMA I.S. 1A, C-6

## Core

Particleboard (which complies with ANSI A208.1) to meet WDMA Extra Heavy Duty

## Lite Openings

See Appendix I

## Factory Finish

- Enviroclad UV® finish
- Prime
- Opaque

## Warranty

Full; life of original installation. No exterior warranty

## Security Rating

Class 40, highest security rating possible per UBC standard 41-1 & ASTM F- 476 Section 18


## Acoustic Rating

See Appendix M

## Environmental Options & LEED Credit Contribution

(Not all credits may be available with some constructions)

- MR 4-Recycled Content- all models
- MR 5-Regional Materials- all models
- MR 6-Rapidly Renewable Materials- all models with Bamboo veneer
- MR 7-Certified Wood- EEHDPC & EEHDPCUF models
- IEQ 4.4-Low-Emitting Materials- all UF models  
No Added Urea Formaldehyde Resins

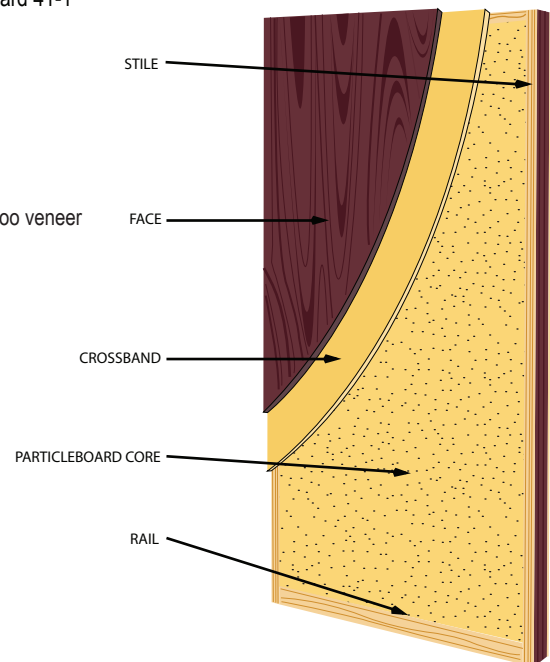

The mark of excellence™ 

Note: Marshfield DoorSystems doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.