

Particleboard Core Doors

Marshfield Signature Series®

Neutral Pressure, Positive Pressure, Environmental, DurableDoor™

Standard Models: DPC, DFP, DURPC

Environmental Models: EPC, EPCUF, EDPCUF, EDURPC, EDURPCUF

Product Features
and Specifications

Interior Use Only

Thickness

1-3/4", 1-3/8", 2", 2-1/4"

Maximum Size

	ITS-WH and UL- Max 20 minute				
	Non Rated	NP	Cat. A (PP)	Cat. A (PPAF)	Cat B (PPFM)
Single	4/0 x 10/0	4/0 x 10/0	4/0 x 10/0	4/0 x 9/0	4/0 x 10/0
Pair	8/0 x 10/0	8/0 x 10/0	8/0 x 9/0	8/0 x 9/0	8/0 x 9/0
DE Pair	8/0 x 10/0	8/0 x 8/0	8/0 x 9/0	N/A	8/0 x 9/0
1-3/8" Single	4/0 x 10/0	3/0 x 7/0	N/A	N/A	3/0 x 7/0

Minimum Size

0/8 x 1/10 or 1/10 x 0/8

Faces

- Wood Veneer
- Decorative Laminate
- DurableDoor™ PVC Face
- MDO
- Styled® Door Face

Crossbands

Engineered Composite

Stiles

Manufacturer's standard construction per label service listing with edge band to match face

Top and Bottom Rails

Manufacturer's standard construction per label service listing

Face & Core Assembly Adhesive

Per requirements of WDMA I.S. 1A, C-6

Core

Particleboard core (which complies with ANSI A208.1)

Lite Openings

See Appendix I

Factory Finish

- Enviroclad UV® finish
- Prime
- Opaque

Warranty

Full; life of original installation. No exterior warranty

Security Rating


Class 40, highest security rating possible per UBC standard 41-1 & ASTM F-476 section 18

Acoustic Rating

See Appendix M

Environmental Options & LEED Credit Contribution
(Not all credits may be available with some constructions)

- MR 4-Recycled Content- all models
- MR 5-Regional Materials- all models
- MR 6-Rapidly Renewable Materials- all models with Bamboo veneer
- MR 7-Certified Wood- EPC, EPCUF, EDURPC, EDURPCUF
- IEQ 4.4-Low-Emitting Materials- all UF models
No Added Urea Formaldehyde Resins

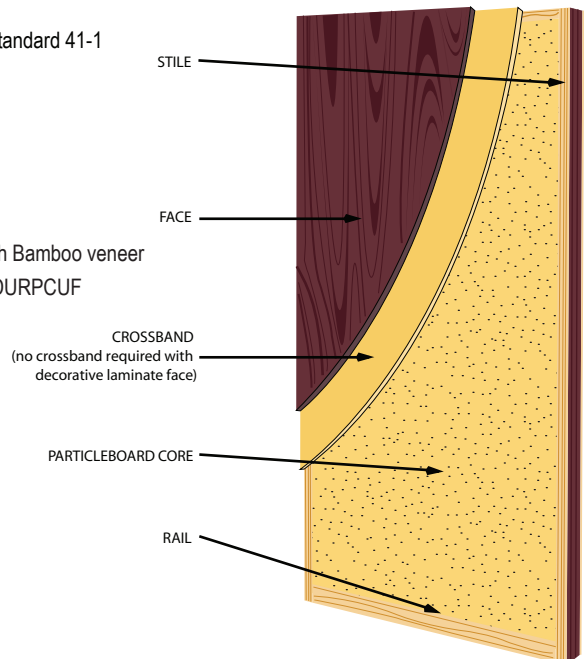

The mark of excellence™



Note: Marshfield DoorSystems doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.